JK TECH

Your Solution Partner for Interior/Surfacing Materials



ABOUT JK TECH

JK TECH in a solution partner for whom are interested in acryl sink & basin, solid surface, quartz business, which are raw material, R&D, manufacturing, global marketing & sales.





OUR BUSINESS

ur company cares about every customer's needs and the futo Our company cares for humans and environment.

PRODUCT INFO

Satisfaction guaranteed with the best quality and the lowest price We will provide you a highly standard product.



About JK Tech



JK TECH was established in 2007. After having more than 21 years of R&D, manufacturing, global marketing and sales experience of the Construction materials, Solid Surface and Quartz business at the LG Chemical, we as a global solution partner company, provide what customer needs at variety of levels.

We manufacture and supply acrylic adhesive, acrylic sinks&bowls and also trade Aluminum Trihydrate(ATH), Toner and PolyVinyl Acetate films(PVA) for solid surface manufacturing, craft paper, polishing tools, and a variety of raw materials for Quartz production. We also offer a service for those who need consulting in R&D, manufacturing, marketing and sales in Solid Surface and Quartz business.

We guarantee you the most reliable and dedicated service until you find our products and service satisfying. Contact/Visit us whenever you need our help.



CEO James Jung



Manufacturing & Supply

 Acrylic Solid Surface, Adhesive, Acrylic Sinks & Bowls

Distribution & Trading

- Acrylic Solid Surface & Quartz Surface
- Raw Materials & Accessories for Solid Surface and Quartz Surface
- Machines & Tools for fabrication of Solid Surface
- Interior Film & Deco Foil (PVC/PP sheet)
- Electronic Kitchen/Home Appliances

Consulting

- M&A, R&D, Manufacturing, Sales & Marketing

A			
F	IST	OR'	
1			
-	•		

Awarded \$1 Million Export Tower 2022 of Trade Day 2022~ Launch new products; Solid surface, Interior film, Deco foil, Luxury vinyl tile(LVT) 2019 Acryl bowl supplier for LOTTE CHEM 2018 Acryl bowl supplier for LG Hausys 2017 Acryl basins supplier for Krion in Spain Expanding to global solution partner 2014 for solid surface & quartz business. 2012 Started a acrylic sink & bowl production. Set up a" Uni-care " for medical 2009-2011

2008

trading company.

started a sale in acrylic adhesive for Solid Surface and Quartz



Table of Contents

JK Solid Surface	-	P. 4
- Acrylic Solid Surface Collection	-	P. 5
- Acrylic Sink/Bowl Collection	-	P. 11
- Adhesive and Accessories	-	P. 17
- Specification	-	P. 18

Solid Surface Fabrication Machine - P. 20

Interior Film (Architectural Film) - P. 24
- Self Adhesive Film

Luxury Vinyl Floor Tiles (LVT) - **P. 32**

Kitchen/Home Appliances - P. 37

Deco Foil (PVC/PP sheet, LVS) - P. 42

Partners of JK-Tech



















JK Solid Surface

100% Acrylic Solid Surface, Sink&Bowl and Adhesives

JK TECH Co., Ltd.

- www.jksolidsurface.com
- #501, 14, Yangpyeong-ro gil,
 Yeongdeungpo-gu, Seoul,
 Korea




















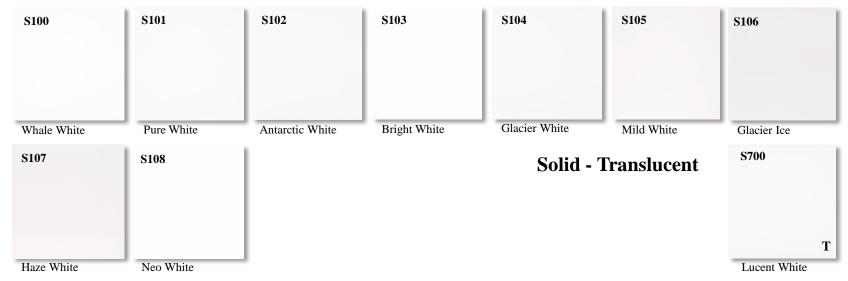

Solid - Vivid






^{*} Color of the above product can be different from actual color of the product

Solid - Vivid




Granite - Small

Sand Meal

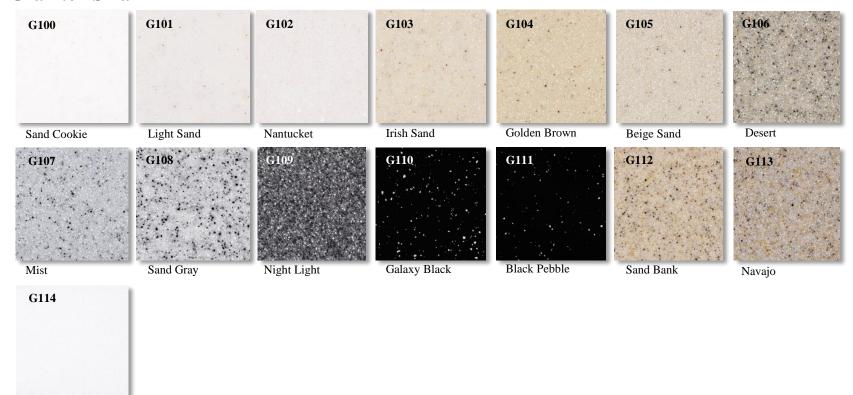


Granite - Medium

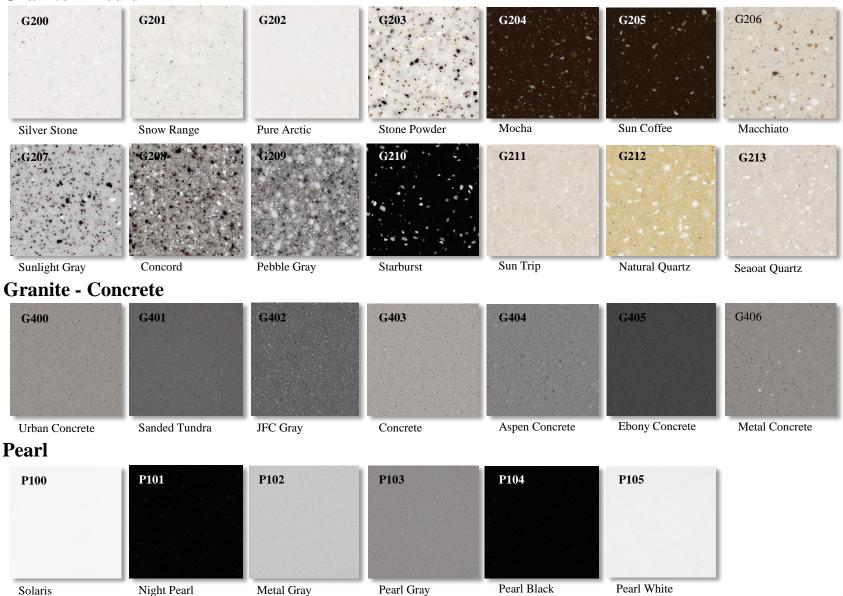

^{*} Color of the above product can be different from actual color of the product



Clear - Small

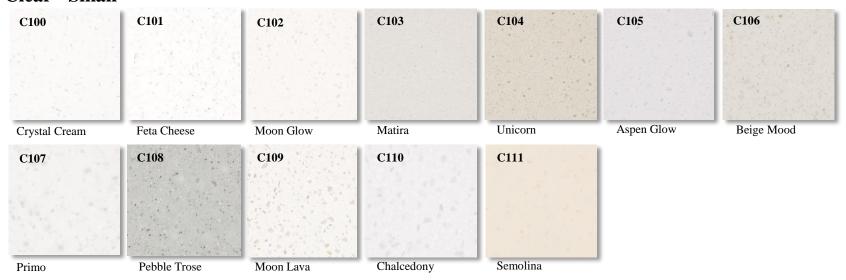


Clear - Medium






Clear Pearl - Small

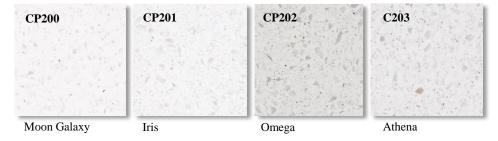

Clear Pearl - Medium




Crystal

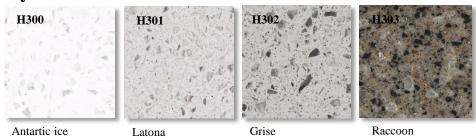



Marble

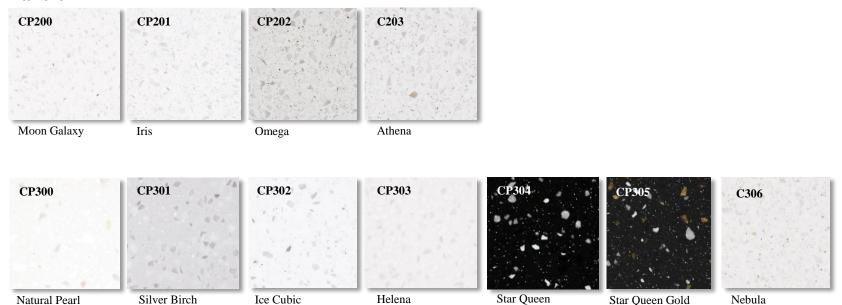

New Series Marble (To Be Updated)

- Available from 3nd Quarter of 2022 in various colors

Colors on Demand from Customer

- Special creation or matching with existing colors of competitor is possible with MOQ in 20ft container



Sinks

JK 101 L 800 X W 460 X D 210mm



JK 102 L 730 X W 440 X D 200mm




JK 103 L 550 X W 432 X D 190mm




JK 104 L 400 X W 400 X D 205mm




Top view




Top view




Top view



Top view



Side cross-section




Side cross-section



Side cross-section



Side cross-section





Sinks

JK 105 L 260 X W 360 X D 120mm



JK 106 L 700 X W 400 X D 180mm




JK 107 L 530 X W 400 X D 180mm




JK 109 L 400 X W 400 X D 300mm




Top view




Top view




Top view




Top view




Side cross-section




Side cross-section



Side cross-section



Side cross-section







Sinks


JK 110 L 400 X W 450 X D 185mm






















Vanity Bowls

JK 301 L 515 X W 362 X D 150mm



JK 302 L 410 X W 330 X D 150mm




JK 303 L 400 X W 400 X D 150mm




JK 308 L 460 X W 370 X D 163mm




Top view




Top view



Top view




Top view



Side cross-section




Side cross-section



Side cross-section



Side cross-section





Vanity Bowls

JK 305



JK 306 L 378 X W 278 X D 116mm




JK 307 L 500 X W 350 X D 115mm




JK 309 L 480 X W 320 X D 121mm




Top view




Top view




Top view




Top view




Side cross-section




Side cross-section



Side cross-section



Side cross-section








Vanity Bowls


JK 310 L 500 X W 280 X D 120mm













<u>Adhesive</u>







Accessories







75ml,50ml Dispenser



Tip(250ml,75ml,50ml)


■Advantages

- High adhesive strength
- Invisible seams
- Variety of colors
- Long Shelf-Life(5years) UV stablility
- Auto dispensing system
- Low TVOC


■Physical Properties

Description	Property		Result
Component A	Appearance		Colored viscous liquid
	Viscosity		Refer to the thixotropy
	Density		1.1 - 1.2 g/cm ³
,	Shelf-Life (at max. 25°C)		5years
Component B	Appearance		Clear viscous liquid
	Viscosity		500 - 550 cps
			1.1 – 1.2 g/cm ³
3			5years
Joint Adhesive Ratio 10:1 of component A and B	Working Time (at	10°C- 30°C)	8 – 20 min.
component A and B	Fixture Time (at 1	0°C- 30°C)	15 – 40 min.
	Weather Test		Indoor UV stability
*	Recommended Temperature	Operating	10°C - 30°C
	Recommended Temperature	Storage	13°C - 25°C



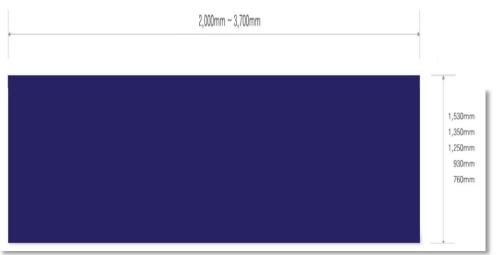



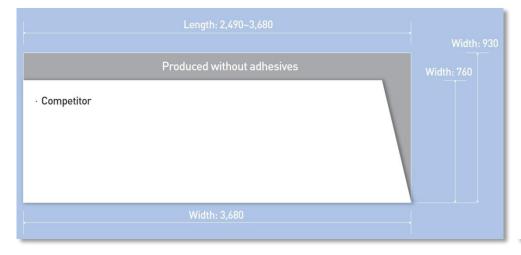

Strengths of Broad Width Products

- Produced without adhesives, incorporated into island kitchen
- Applied to places 760mm tall such as the information desk, etc.
- 2-step counter
- Wall Panel: (Regular Size: 760mm) 1 + a (Broad Width: 930 Regular Width: 760)
 _ Information Desk, 2-step Counter, 9T products easily applied as wall panels
- Lengths varied to meet customer needs to reduce loss



Category 1	Category 2				1	Availabitit	у			
	Thickness(mm)		1	.2		20			6	
	Width(mm)	760	930	1350	1530	760	760	930	1350	1530
	Length(mm)	3680	3680	3680	3680	3680	2500	2500	2500	2500
	Solid-White	0	0	0	0	0	0	0	0	0
	Solid-Translucent	0	0	0	0		0	0	0	0
	Solid-Vivid	0	0	0	0		0	0	0	0
	Granite-Small	0	0	0	0		0	0	0	0
Acrylic	Granite-Concrete	0	0	0	0		0	0	0	0
Solid	Granite-Medium	0	0	0	0					
Surface	Pearl	0	0	0	0		0	0	0	0
	Clear-Small	0	0	0	0		0	0	0	0
	Clear-Medium	0	0	0	0					
	Clear & Pearl-Small	0	0	0	0		0	0	0	0
	Clear & Pearl-Medium	0	0	0	0					
	Crystal	0	0	0	0					
	Marble	0	0	0	0					
	Туре		Catridge							
	Size	50ml	75ml	250ml						
Adhesive	Glue	0	0	0		******************				
	Mixer Tip	0	0	0						
	Dispenser	0	0	0						
	Model	White				Model	White			
	JK101	0				JK301	0			
	JK102	0				JK302	0			
	JK103	0				JK303	0			
	JK104	0				JK305	0			
Sink/	JK105	0				JK306	0			
Bowl	JK106	0				JK307	0			
	JK107	0				JK308	0			
	JK109	0				JK309	0			
	JK110	0				JK310	0			
	JK201	0				JK311	0			
	JK202	0								

	Loading Quantity in 20ft Container									
A1:	Thickness(mm) 12 20 6									
Acrylic Solid	Width(mm)	760	930	1350	1530	760	760	930	1350	1530
Surface	Length(mm)	3680	3680	3680	3680	3680	2500	2500	2500	2500
Surface	Quantity in 20ft(Sh)	300	200	100	100	150	640	640	400	400

• Production of Special Size

- Thickness of 9mm can be produced on demand
- Other special size needed to be discussed

• Shipment and Payment Term

- Only container base (20ft recommended)
- 100% T/T in advance before shipment
- FOB Busan (Korea) or CIF Main Ports in EMEA Possible

• MOQ

- 40 sheets for colors from the collection
- Quantity for 20ft container for colors specially developed on demand.
- About 20 pcs for each model for Sink/Bowl

• Loading of Sink/Bowls & Adhesives Sink/Bowls and Adhesives are usually shipped together with Solid Surface Sheets. In case that 20ft container is used, there is left space about 2m x 2m after loading Solid Surface Sheets and Sink/Bowls & Adhesives can be loaded in this area.



KOMOTEK

Solid Surface Fabrication Machine Series





www.komo-tek.com




Komotek has been continued to develop thanks to its research and development in the imitation marbles field and continuous improvements, endless efforts to maintain accuracy of manufacturing technology, and the management philosophy of service for customer satisfaction, and has been recognized by the clients. Komotek Co., Ltd. would like to continue to be a imitation marble equipment brand that can be recognized not only in Korea but in the global market.









Artificial Stone Cut Saw

An equipment that cuts materials like MMA, UP, BMC into various sizes. Cuts up to 800 width and 100mm height, and the fastest cutting speed is 30 m/m per minute. Optimized cutting conditions for imitation marbles, the accuracy of tailoring, degrees of precision and vertical angle are very high. It uses one-touch saw replacement method that makes replacing the saws much easier and safer. Top press holds the product in place and the saw tailors it so the saw isn't in sight to lessen the accident rate and it's very efficient in filtering the dusts.

It can be used for multi-purpose since half-finished products like BMC can be cut.

CNC Sink Bowl Router

Equipment that processes materials such as MMA, UP, BMC, etc. to CNC 2D and 3D. This equipment is used mostly in perforating the holes for kitchen sinks that use imitation marbles. Also used for processing shapes for any kind that uses imitation marbles. Cuts up to 800 width and 100mm height, and the fastest cutting speed is about 3.5m per minute. Optimized cutting conditions for imitation marbles, the material fixation is vacuum-clamping, and the air-ventilating hold is engineered so that it filters more than 99% of dust to make the processing environment more pleasant. Various sizes of hole sizes are pre-set to make the use easier, and anyone can use this interactive CNS controller after 30 minutes of training. It can be used for multi-purpose since half-finished products like BMC can be cut. All equipments of Komotek is optimized for imitation marble materials.

Solid Surface V-Grooving

A multiple tailoring and grooving equipment that makes V-grooves to fold imitation marble materials such as MMA, UP, BMC, etc. and also tailors the length. An equipment that cuts materials like MMA, UP, BMC into various sizes. Cutting and V-grooving up to 850 width and 20mm height, fastest cutting speed of 10 m/m per minute. Optimized cutting conditions for imitation marbles, the accuracy of tailoring, degrees of precision and vertical angle are very high. Very efficient in filtering dust. Can be customized to various requirements. Various functions at the bottom of the equipment, such as dusting, automatic taping, and multi-blades.


Solid Surfaces Auto Feeder lift

Automatic feeding lift that feeds the imitation marble materials automatically.

When the raw materials are loaded in the palette and delivered and the materials in 800mm width x 3680 length x 700mm height (including the pallette) about 3 tons in weight are put on the auto feeder by the forklift, the imitation marbles are fed one by one and lifted one by one according to the height of the feeds.







Solid Surface CNC All-in-one machine

An all-in-one sanding beveling machine that bevels the bond in the front, sides, back and left and right walls and punches the hole in the location where the sink ball gets inserted, after the tailoring and V-grooving of the top plate of kitchen sink. All programs are in interactive system that automatically processes the materials by the exterior size and control of selected functions. All-in-one CNC sanding machine used for top plates of kitchen sinks for apartments.



Artificial marble kitchen sink sanding processing line

A sanding machine that makes 550~750 wide top plates of sinks by sanding the front and sides, water holes of the front apron, the sills in the back and the left and right, and adjusting the width with the measurement controller, after the tailoring and V-grooving of the top plates of imitation marble kitchen sinks. Sanding line applicable to mass production system.




Solid Surfaces CNC 3D Machine

CNC equipment that works on 2D process to make casts before working on imitation marble molding or 3D process after molding or gluing of imitation marbles.

For more information, please refer to 'KOMOTEK Catalog'





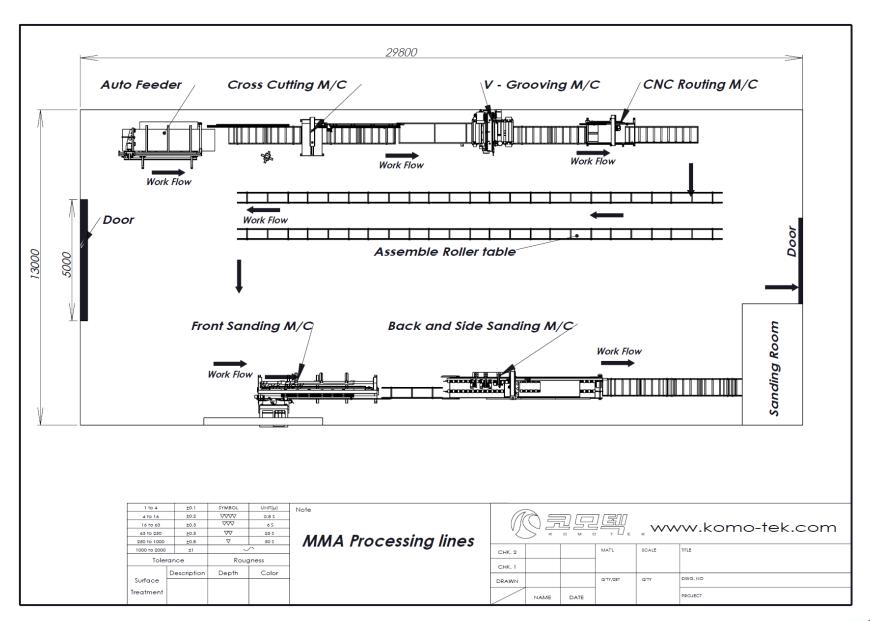





SOIF Interior Film

Interior Film (Architectural Film) – Self Adhesive Film

SAMSUNG INTERIOR FILM CO., LTD

http://www.samsungfilm.co.kr

JK Tech. Co., Ltd - SOIF Official Distribution Partner










1. Introduction SOIF Interior Film

ABOUT INTERIOR FILM

Interior Film is decorative architectural films with pressure sensitive adhesive (a self-adhesive decorative films) with excellent design quality, durability, and water resistance. With a rich variety, Soif Interior Film has been used more than a decade in a variety of applications around the world, ranging from interior of buildings to fittings, furniture, wall panels

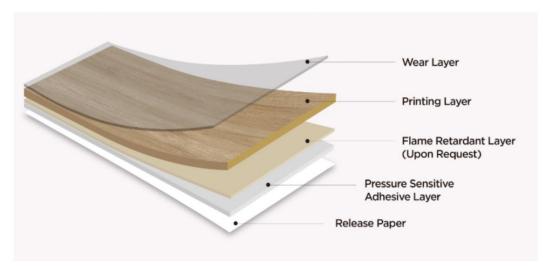



1. Efficiency

Compared with existing surface finishes, installation is easier, which reduces work schedules. The precision of the work is improved. It is also efficient as it can be easily changed if it needs to be changed or repaired.

2. Design originality

Natural wood grain type and More.

It is possible to produce various colors, Patterns and surface textures such as high-quality metal type, leather and suede texture type.

3. Convenience

Excellent adhesion due to special adhesive treatment for applying on flat and curved surfaces.

4. Durability

Excellent durability against impact, friction, and scratches. Excellent dimension stability against changes in heat, temperature and humidity, and contamination resistance from solvents and chemicals.

5. Excellent flame retardancy & safety

It is a product that passed strict fire-prevention inspection of the KOREA FIRE INSTITUTE.

BOX INFORMATION

М	Kg	w	т
50	28	1.220mm	0.42mm

STANDARD PACKAGE (EXPORT)

Pallet	Container	Stack-Up
20 Box	16 PLT	2





1. Introduction SOIF Interior Film

























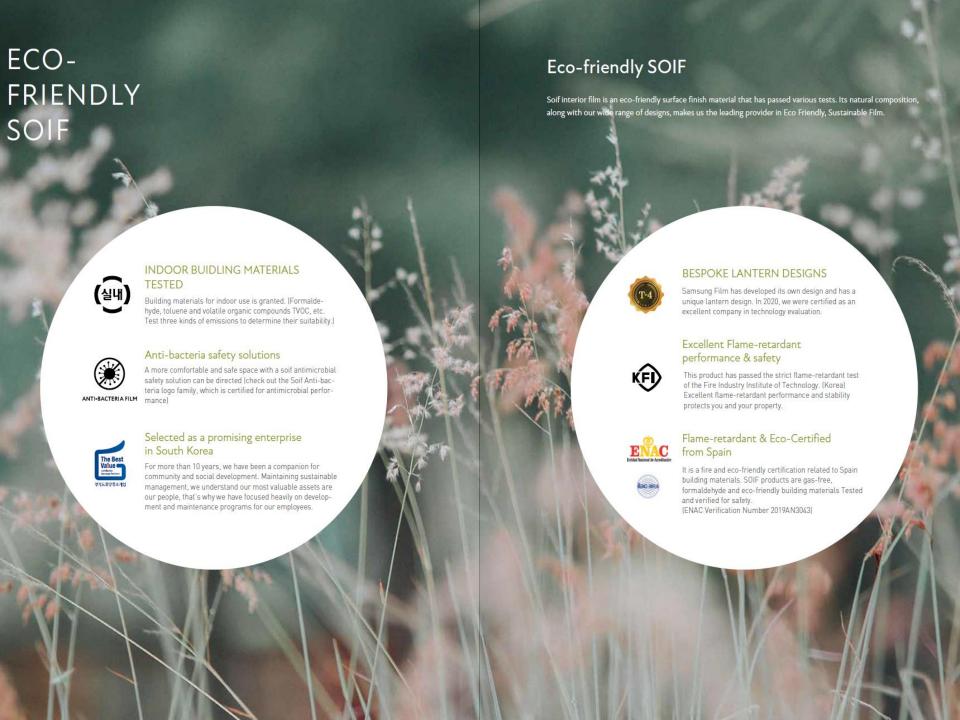

2. Applications SOIF Interior Film



YG/YF-4502

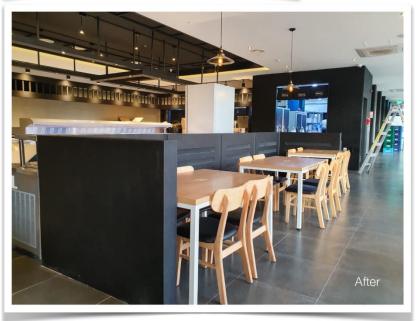



CG/CF-5511











3. Specification SOIF Interior Film

PRODUCT DESCRIPTION SAMSUNG INTERIOR FILM : SOIF GLOBAL



Material PVC, monomeric calendered film

Adhesive Acrylic (free of solvent), environmentally friendly

Adhesive protective foil Paper, 120 g/m² printed with a grid of centimeters

(Backing Paper)

Roll Size: 122 cms width x 50 mt / roll Shrunk with a PE-foil

Packing info.:

Label is placed inside top of the core and carries reference number and date of production.

The packaging carton is printed and equipped with a white label containing reference number,

date of production and quantity.

Package info.: 1 roll / carton box

Standard Length (m)	50m	Width (mm)	1,220mm	
Total Weight (kg/Box)A	32kg	*Flame Retardant grade		
Total Weight (kg/Box)B	28kg	*REGULAR grade		
Thickness (mm)	0.42mm	*Vary by Emboss		
Base Material	PVC			


For more information (including colors and technical data), please refer to 'Soif Introduction' & 'Soif E-Catalog Vol.4'





DECORIA Luxury Vinyl Tiles (LVT)

The prestigious luxury vinyl floor

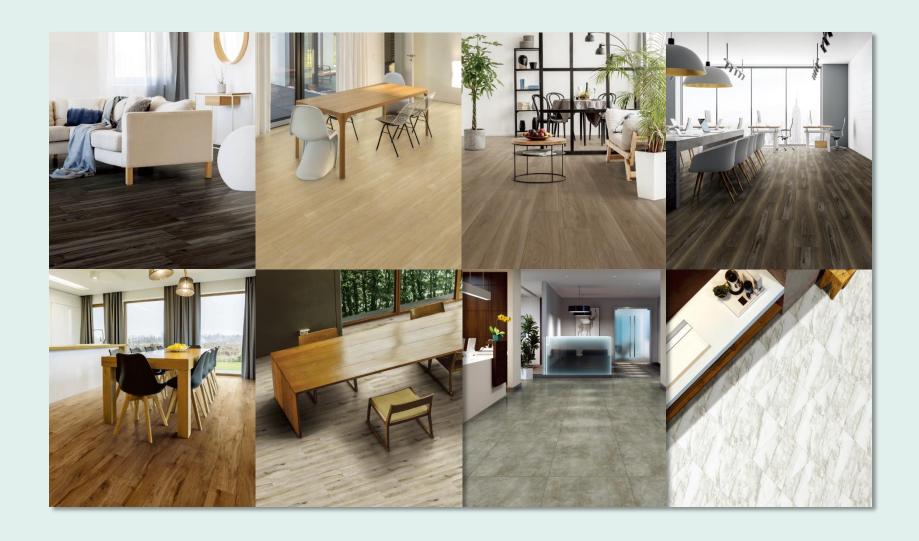

DEC©RIA

The Prestigious name of luxury vinyl floor from Korea

DAEJIN is the first company introduced Luxury Vinyl Tile in Korea, and is supplying newly developed eco-friendly products to world customers. Our international activities cover all around the world including USA, Europe and many other countries you know, by providing Loose-lay tiles which can be installed without adhesive and anti-scratch durable UV products to overseas market. We will continue our efforts and challenges to fulfill customer satisfaction.





High Density PU Coating

Improved PU coating enhances protection from scratches, and assures comparably longer life times.



Glass Fiber Sheet

Additional glass fiber layer can improve dimensional stability by minimizing shrinkage and expansion of product.



Glueless Installation

Non-slip of assembly technology allows easy installation with no use of adhesive.



Eco-friendly Material

Products made with recycled material improves environmental protection. Virgin product is also available upon customer's request.



Various Color / Pattern Design Collection

Various colors and patterns with more than 500 of selection allows you find most suitable design for your flooring.






























- · Floor Score
- · KS Certificate (Korea Standards Association)
- · Quality Management System (GERMAN CERT)
- Environmental Management System (GERMAN CERT)
- European International Standards
- Hygenic & Fire Certificate (Russia)
- · Environmental Product Declaration (Korea Environmental industry & Technology Institute)
- · Eco-Label (Korea Environmental industry & Technology Institute)
- · Environmental Product Declaration (SCS global services)

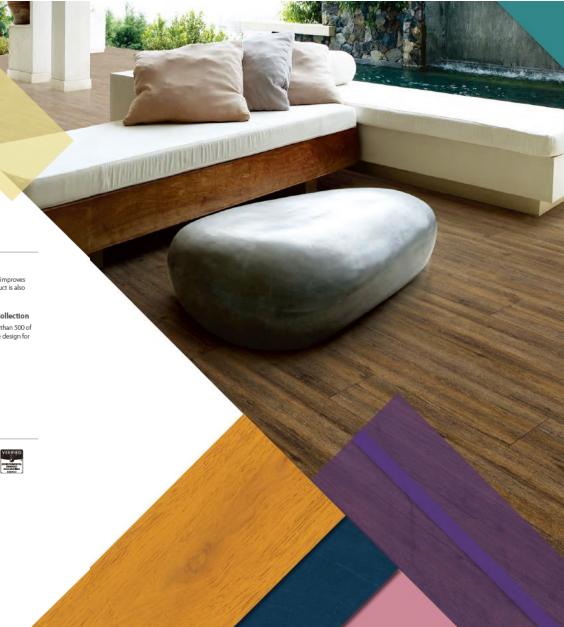



Extra Wide and Long Wood Flooring

- · New original wood flooring design with extended size
- Size: 9" × 60" (228.6mm × 1,524mm)
- · Realized natural variety of real wood
- · Shows interior of satisfying appearances.



228.6mm × 1,524mm



184mm × 950mm



Extra Wide Design Square Tiles

- · New original square tiles with extended size
- Size: 600mm × 600mm
- · Realized natural variety of real wood
- · Shows interior of satisfying appearances.




600mm × 600mm




470mm × 470mm

ECORIA Looselay-NS Environment-friendly glueless luxury viryl tile

- · High density PU coating
- · Apply of US EPA approved organic and inorganic hybrid antibacterial agents
- · Improved stability in environment of severe temperature change with reinforced glass fiber
- · Easy installation free from adhesives
- · Non-slip function prevent product slip from surface





roduct spec	incation	(mirri)
Thickness	Wear Layer	Product Size
	-	177.8×1,219.2(7'×48")
	0.3	228.6 × 1,219.2 (9" × 48")
5 mm	0.5	228.6 × 1,524 (9"×60")
	0.7	470×470
	-	600×600










Eco-friendly functional flooring

- · High density PU coating
- · Apply of US EPA approved organic and inorganic hybrid antibacterial agents
- · Various color and pattern design collection
- Various sizes










ECORIA Acoustic Noise absorbing luxury vinyl tiles for silent residential environment


- · High density PU coating
- · Apply of US EPA approved organic and inorganic hybrid antibacterial agents
- · Improved stability in environment of severe temperature change with reinforced glass fiber
- · Easy installation free from adhesives
- · Non-slip function prevent product slip from surface
- · Realize quiet environments with noise absorbing layer







- · High density PU coating
- · Apply of US EPA approved organic and inorganic hybrid antibacterial agents
- · Improved stability in environment of severe temperature change with reinforced glass fiber
- · Easy installation free from adhesives



(mm)




Quick and Easy Click Installation

ECORIA DSPC Rigid Core without containing wooden material

igh density PU coating

pply of US EPA approved organic and inorganic hybrid antibacterial agents nproved stability in environment of severe temperature change, with reinforced glass fiber asy installation free from adhesives

arious colors and pattern design collection



Thickness	Product Size	
4.5 mm		
6.0 mm (IXPE 1.5 mm)	169 × 1,210	
130PE layer optional : 1.5 mm	20.2009(SW)	
	CONTRACTOR OF THE PARTY OF THE	
	W. 2018	

Quick and Easy Click installation

2 Tone Shade Change Single tone design into Mulitple Shade design

ulti shade design from Daejin's special methods. ealized modern style color variation flooring. everal Color tone patterns in one carton









2. Specifications DECORIA LVT

Dryback (Glue down)

Thickness	Wearlayer (mm)	Width & Length (mm / Inch)	perCTN	20FT Container Loading Quantity
		184 x 950	28 pcs (4.89 SQM)	4,890 sqm (1,000CTN)
2	0.1	187 x 935	28 pcs (4.89 SQM)	4,890 sqm (1,000CTN)
2 mm	2 mm 0.2 0.3	177.8 x 1219.2 (7" x 48")	22 pcs (4.77 SQM)	4,770 sqm (1,000CTN)
		470 x 470	22 pcs (4.86 SQM)	4,860 sqm (1,000CTN)
	0.2	184 x 950	23 pcs (4.02 SQM)	4,020 sqm (1,000CTN)
2.5 mm	0.3 0.5	187 x 935	23 pcs (4.02 SQM)	4,020 sqm (1,000CTN)
	0.55	177.8 x 1219.2 (7" x 48")	18 pcs (3.90 SQM)	3,900 sqm (1,000CTN)
		184 x 950	19 pcs (3.32 SQM)	3,320 sqm (1,000CTN)
		187 x 935	19 pcs (3.32 SQM)	3,320 sqm (1,000CTN)
	0.1	177.8 x 1219.2 (7" x 48")	15 pcs (3.25 SQM)	3,250 sqm (1,000CTN)
	0.2 0.3	228.6 x 1219.2 (9" x 48")	13 pcs (3.62 SQM)	3,620 sqm (1,000CTN)
3 mm	0.5	228.6 x 1524 (9" x 60")	13 pcs (4.53 SQM)	3,298 sqm (728CTN)
	0.55	314 x 625 (12* x 24*)	18 pcs (3.53 SQM)	3,530 sqm (1,000CTN)
	0.7	470 x 470	15 pcs (3.31 SQM)	3,310 sqm (1,000CTN)
		600 x 600	9 pcs (3.24 SQM)	3,240 sqm (1,000CTN)
		152.4 x 914.4 (6" x 36")	24 pcs (3.34 SQM)	3,340 sqm (1,000CTN)

Loose Lay (Non-Slip, Rubber, Dryback)

Thickness	Wearlayer (mm)	Width & Length (mm / Inch)	per CTN	20FT Container Loading Quantity
	0.3 0.5 0.7	7" x 48"	10 pcs (2.17 SQM)	2,170 sqm (1,000CTN)
		9" x 48"	8 pcs (2.23 SQM)	2,230 sqm (1,000CTN)
5 mm		9" x 60"	8 pcs (2.79 SQM)	2,031 sqm (728CTN)
		470 x 470	10 pcs (2.21 SQM)	2,210 sqm (1,000CTN)
		600 x 600	7 pcs (2.52 SQM)	2,520 sqm (1,000CTN)

Click System

Thickness	Wearlayer (mm)	Width & Length (mm / Inch)	perCTN	20FT Container Loading Quantity
4.3 mm	0.3 / 0.5	169 x 1210	10 pcs (2.04 SQM)	2,040 sqm (1,000CTN)
5 mm	0.3 / 0.5 / 0.55	169 x 1210	10 pcs (2.04 SQM)	2,040 sqm (1,000CTN)

Acoustic (Non-Slip)

Thickness	Wearlayer (mm)	Width & Length (mm / Inch)	perCTN	20FT Container Loading Quantity
5 mm	0.5	0.5 184 x 950 10 pcs (1.78 SQM) 1,76	1,780 sqm (1,000CTN)	
311111	0.3	7" x 48"	10 pcs (2.17 SOM)	2.170 sam (1.000CTN)

DSPC (Click System)

Thickness	Wearlayer (mm)	Width & Length (mm)	perCTN	20FT Container Loading Quantity
4.5 mm	03/05	1601210	0(1.04.50M)	2 200 (1 200CTN)
6 mm (IXPE 1.5 mm)	0.3 / 0.5	169 x 1210	9 pcs (1.84 SQM)	2,208 sqm (1,200CTN)

[■] IXPE layer optional: 1.5 mm

Specific Measurements of DECORIA

Type & Composition		Type & Composition PVC Laminated Floor Covering	
Application		Application Commercial, Residential	
Surface Treatment		Surface Treatment PU & Anti-bacterial, Per design	
Profile		Profile Beveled / Non-beveled, Per design	
Tile Size(mm)	EN 427	470 x 470, 184 x 950	
Total Thickness(mm)	ISO 24346 (EN 428)	3.0	
Wear Layer Thickness (mm)	ISO 24340 (EN 429)	0.3 0.5 0.7	
F. B. ()	EN 13501-1 Bfl - S1	Bfl - S1	
Fire Rating	Mekel Burner Test	Pass	
Heat Stability	KSM 3802	0.3mm / 0.05 (80°C + 2°C , 6hr / hr)	
Slip Resistance	BS 7976-2	PVC Laminated Floor Covering RZ Surface Roughness : Moderate	
Residual Indentation	EN ISO 24343-1 (EN 433)	≤ 0.10 mm	
Color Fastness	ISO 105-802	≥6	
Dimensional Stability	ISO 23999 (EN 434)	≤ 0.25%	
Flexibility	EN 435	No Crack was found	
Electrical Behavior	EN 1081	Pass	





PACECO Electronic Appliances

Electronic Kitchen & Home Appliances







Dual (Twin) Inverter PWA-3300W

Rated voltage	220V~ , 60Hz (50Hz)			
Power Consumption	725W			
Product Size	330*277*855mm (W*D*H)			
Product weight	20.5Kg (N.W)			
Cooling capacity	2,350 (19m²)			
Dehumidifying Capacity	32.2 (L/Day) (by KTC)			
Temperature setting	18~30°C			
Noise Level (Sleeping mode)	37.1 (by KTC)			
Reservation time	1~12hr			
Drainage system	Self-evaporating system			
Refrigerant	410A			
Compressor	LG Dual (Twin) Inverter Compressor			









Wide air conditioning up to 120°



Daily 32.2L dehumidfication **Capability**



Noise Test: 37.1dB



Windows open

Windows closed

Unobtrusive clean back

Window lock available

CONVENTIONAL Inverter Compressor"

Fast Cooling Technology

(no requirement of outdoor unit)



Self-evaporation



Tighten the bolts to

secure the installation kit.





Mount the installation Install the air conditioner



Front Side





Installed to the height of the window

Easy Installation by anyone












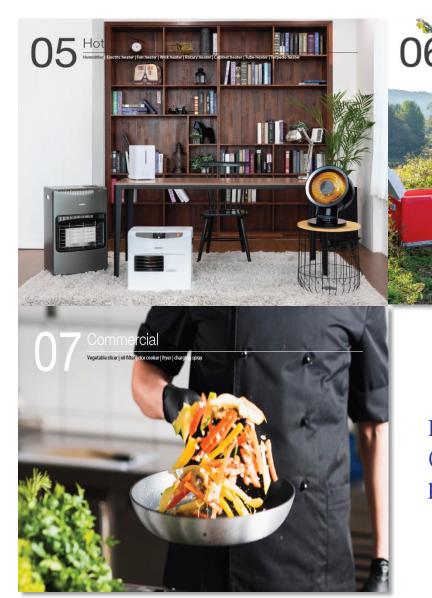







SHINHO Deco Foil (sheet)

PVC/PP/PET Deco sheet and Flooring sheet



ECOTECTURE





The sheets laminating produced through specialized integrated production system of SHINHO INDUSTRY

ECOTEC

Exported to many countries, it is manufactured by the calender line - the latest automation equipment – having smooth surface, gloss, dimensional stability, and excellent gravure property for decorating. It is used for high-grade deco sheet, building materials, and interior sheet which requires delicate color expressions.

ECOTECTURE



LVS

With SOUNDPROTEC noise prevention technology, the LVS provides a comfortable walk with noise absorption. LVS, which can be built in every space of the house, from frequent walking or humid spaces, provides a durable floor with a similar appearance to natural materials. Experience LVS with practical durability to fit in with sophisticated space production.

ECOTECTURE


2D Foil

2D foil

For interior doors, furniture components, door frames, floor boars, or window boards, our special thermoplastic 2D foils can be used. With an impressive range of colors, effects, gloss levels, surface designs, and surface embossing, we will satisfy your individual requirements.

Overview of all features

- 1. Does not contain plasticizers (for special products).
- 2. Free from heavy metals.
- 3. Resistant to stains.
- 4. Scratch and wear resistance by special coating.
- 5. Light fast and UV resistance.
- 6. High elasticity and toughness.
- 7. Excellent embossing stability.
- 8. Primer or corona (for PP foils) possible.

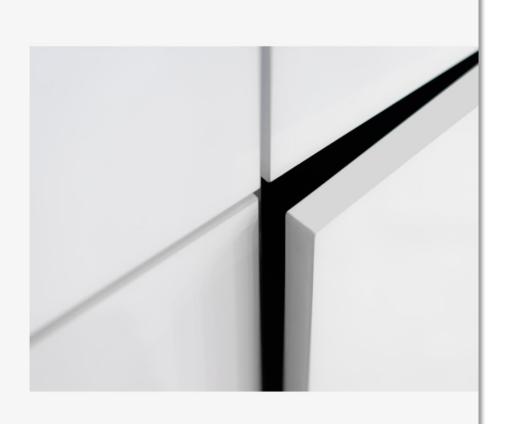





ECOTECTURE



3D Foil

1. Perfect solutions for every area of application

3D foils are suitable for difficult profile geometries with the smallest manufacturing tolerances and offer versatile application options for furniture fronts, furniture elements, and interior doors.

Our 3D hard foils stand out with the highest visual consistency, excellent processing properties and functional characteristics as well as extreme durability. All 3D foils are free from softeners, heavy metals, and other impurities that are dangerous to health.

2. 3D Applications

Our 3D foils are used for the manufacture of kitchen, bedroom and bathroom furniture components.

The surface of our 3D foils is coated with a scratch-resistant lacquer that protects the material in use and helps withstand wear and tear. The back of the film is coated with a special primer to promote a durable and lasting bond.

The primer has been specifically developed to be compatible with the world's leading adhesive systems.

Our 3D foils are supplied as decorative surfacing for lamination to MDF using a thermoforming process.

Designers have the flexibility to combine these materials to produce beautiful furniture and create stunning interior projects. With our limitless possibilities, we also offer innovative solutions for retail interiors, hospitality areas and office spaces.





1. Products - LVS SHINHO Deco Foil

LVS

FEATURES

1. EMT™ Core SOUNDPROTEC technology with a more silent noise absorption

LVS has a shock absorption of approximately 1.4 times as much as the floor. The dense cushion layer with EMT™ Core-5D absorbs the shocks and provides a great sense of walking.


2. EPT™ Shield & EMT™ Core Technology

EMT™ Core - a more robust multilayer method

- EMT™ Core structure is strong for stamping with solid product durability, and excellent floor stability for good construction.
- · The thickness of the product remains uniform and does not cause a difference

EPT™ Shield - safer premium natural matte coating

- · NO phthalate plasticizer! Heavy metal content Zero!
- · Eco-friendly certified flooring materials using eco-friendly plasticizer
- · A flooring material that prevents the growth of fungi, which is more hygienic and clean.
- · Slip resistant floor 1.5 times better than plywood floor/steel floor.





EPT™ Shield

- · Antibacterial PU Coating with Skid Resistant
- · Design protection upper layer



EMT™ Core-5D

- · HD design printing layer
- · G/F measurement stable layer
- · High elastic cushion layer



SPECIFICATION

LVS 1.8T		LVS 2.2T		LVS 3.2T		LVS 4.5T	
Thickness 1.8T		Thickness 2.2T		Thickness 3.2T		Thickness 4.5T	
Width:	1.83M	Width:	1.83M	Width:	1.83M	Width:	1.83M

Length: 35M/Roll Length: 30M/Roll Length: 23M/Roll Length: 18M/Roll

USAGE

Kindergarten, School, general housing / Apartment living room / rooms / multipurpose / religious facilities etc.





1. Products - LVS SHINHO Deco Foil


3. A more original and more natural design

More original design

· Various natural material designs, including terrazzo designs, include herringbone wood, ceramic tiles, and Bianco Carrara

More natural, wooden floor-like 'grand design'

· Longer tree-side design allows for a cooler space.

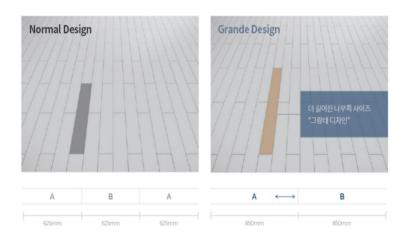

5. A more hygienic, anti- fungal breeding treatment


A more hygienic and clean anti- fungal breeding flooring material because fungus does not grow





4. Cleaning and maintenance made easier

Sewing anti-pollution flooring material that is easy to clean and maintain with no fear of foreign substances

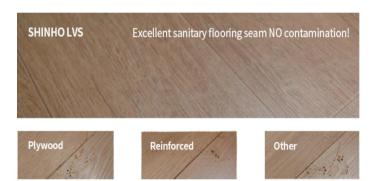

6. Slip Test Results

What is slip resistance? A flooring material with non-slip surface coating to ensure stability. The higher the slip resistance factor, the less slippery



For more information (including colors), please visit www.shinhodecor.com





- Thank you -